NEW PRODUCT

RELN

Our newest addition to the surface water drainage range.

RELN Storm DRAIN™ PRO

- Large capacity 150mm channel
- Galvanised steel edges, light commercial rated
- Available in convenient, manageable 1m lengths
- Built in integral flange for easy corner connection

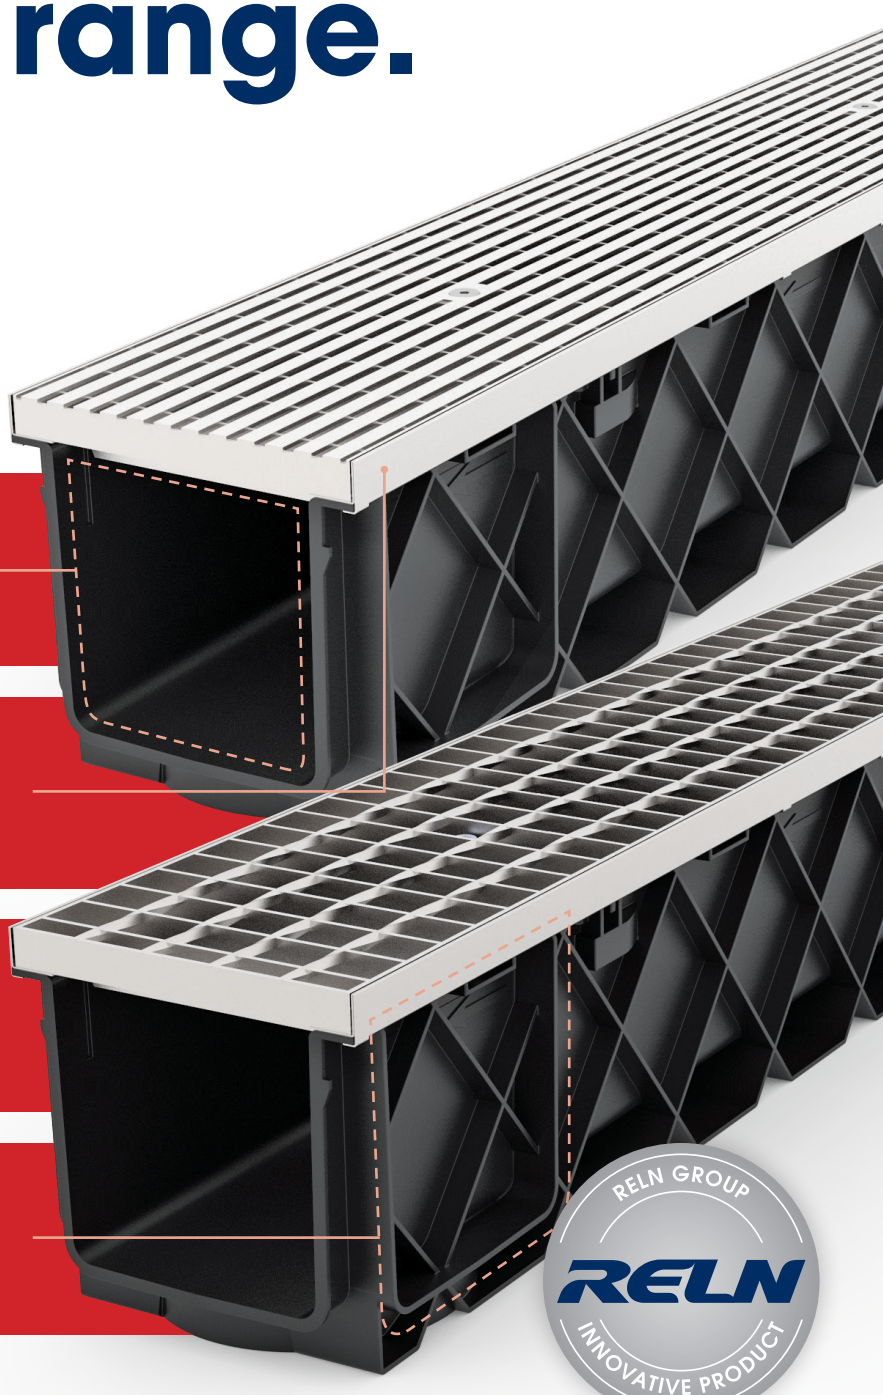

RELN GROUP RELN INNOVATIVE PRODUCT

> Features

- RELN Storm Drain Pro is an injection moulded polymer (polypropylene) surface water drainage channel of internal dimensions 150mm wide by 150mm deep. External Dimensions 202mm wide x 205mm deep.
- Outlet of collected water is via connection to PVC pipe through a multi size bottom outlet socket.
- Corners can be made by cutting out the side of the channel and connecting at the integral side flange.
- The channel has a tongue and groove assembly joint for each end with side clips to hold the channel firmly connected.

- Locking bars for anti-tamer
- Proven Criss/Cross design
- Galvanised edges Standard

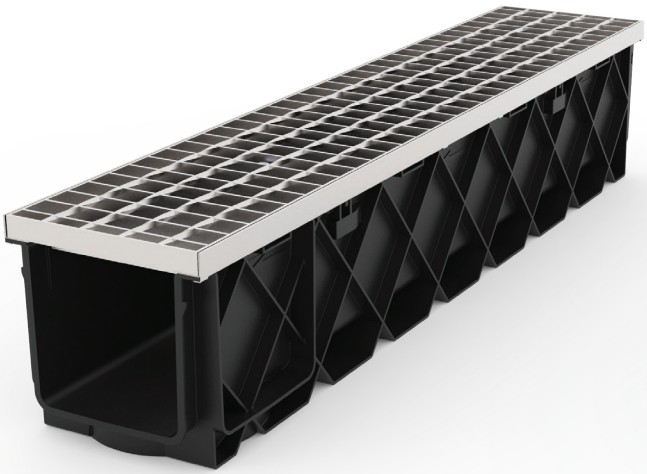

Storm Drain Pro with Galvinised Class B Grate

Storm Drain Pro with Heel Guard

Code	Description	Actual Wt.	Nominal Reported Wt.
210010	RELN Storm Drain Pro – AU – c/w Class B Gal Grate	9.67kg	9.7kg
210012	RELN Storm Drain Pro – AU – c/w Class B H/Guard Gal Grate	8.94kg	9.0kg
210016	RELN Storm Drain Pro – AU – c/w Class C Gal Grate	12.95kg	13.0kg

> Accessories

Storm Drain Pro - End Cap

Product Code: 210002
Weight: 115gm

Storm Drain Pro – Leaf Guard

Product Code: 210003
Weight: 77gm

For further information on all RELN products,
visit www.reln.com.au
Call: 1300 137 356
Email: sales@reln.com.au

RELN.com.au